

TT VibratingScreen


The **TT VibratingScreen** can be used as final stage for fibre recovery after cleaning units such as vortiscreens, superscreens and pressure screens. The unit is completely manufactured in stainless steel and it is equipped with an electro-vibrator installed

on the filtering vat. The vibration frequency can be adjusted by changing the position of the eccentric masses. On the **TT VibratingScreen** it is possible to fit a wide range of screening plates with different holes and characteristics in order to comply

with all the possible operating conditions. To optimize the fiber recovery effect and keep the plate clean, a shower is provided on the unit.

HEADBOX AREA

- Final stage for fibre recovery
- Manufactured in stainless steel
- Additional shower is available

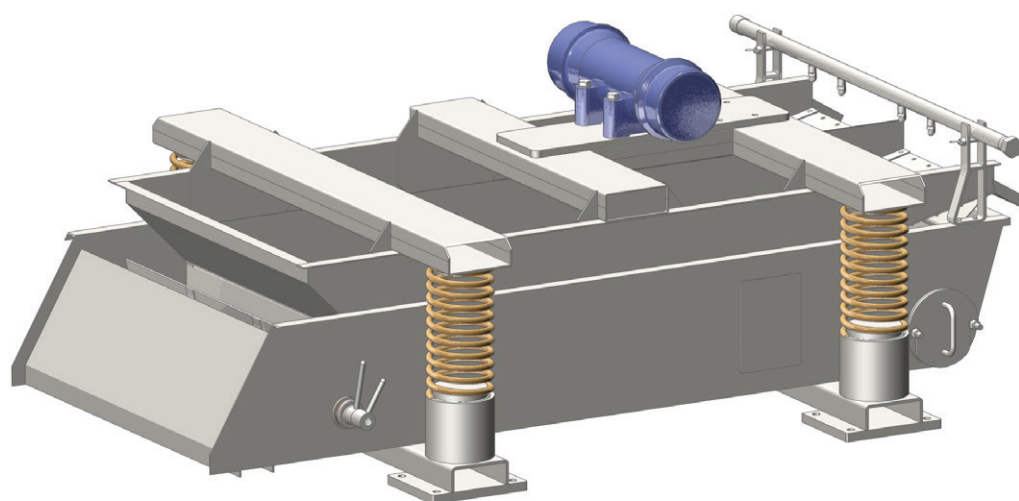

Model	V1V	V2V
Filtering surface (m²)	1	2
Conical hole diameter (mm)	2-5	2-5
Max hydraulic capacity (l/min)	700	1400
Installed power (kW)	1.2	1.2

