

MODULO-PLUS

The big challenge: small machine features high gross production.

The **MODULO-PLUS** unit consists of a four roll cantilevered Crescent Former with a \varnothing 1200 mm forming roll, a single jet headbox (TT Headbox-SLT), a pneumatically loaded


TT SuctionPressRoll-SPR765, \varnothing 400 mm rolls, Steel Yankee Dryer TT SYD-12FT working at max 10 bar (g), pneumatic Pope reel type TT Reel-P with max reel diameter up


to 2500 mm and Monosystem gas fred hood by Milltech.

A design with two presses is an optional.

Benefits

- High ROI
- Energy Saving Model is Available
- High Flexibility of Raw Materials
- Turn Key

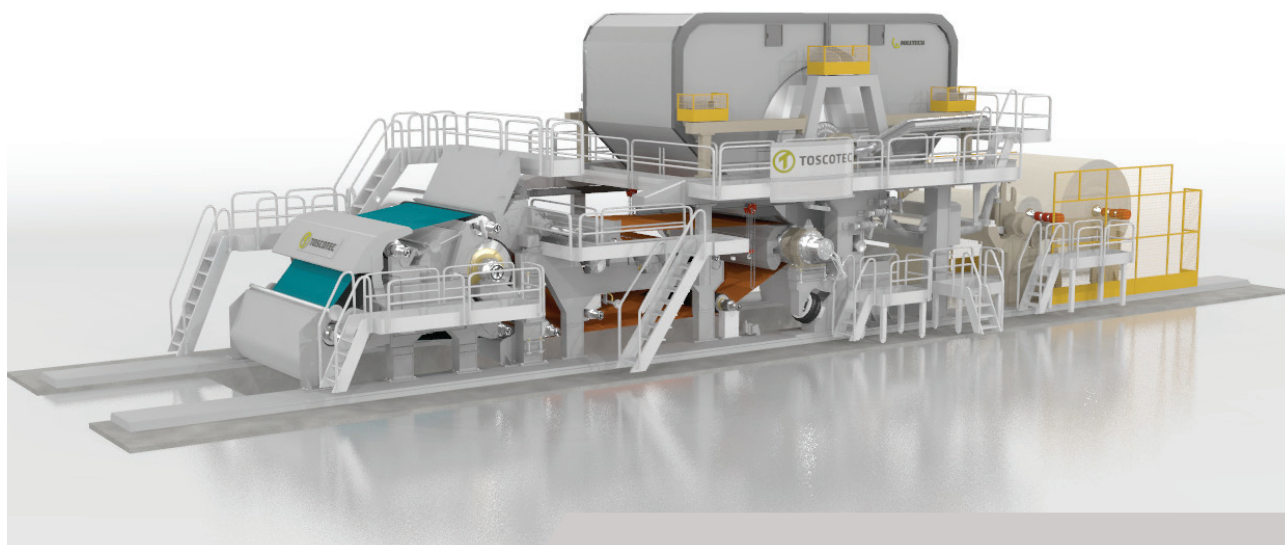

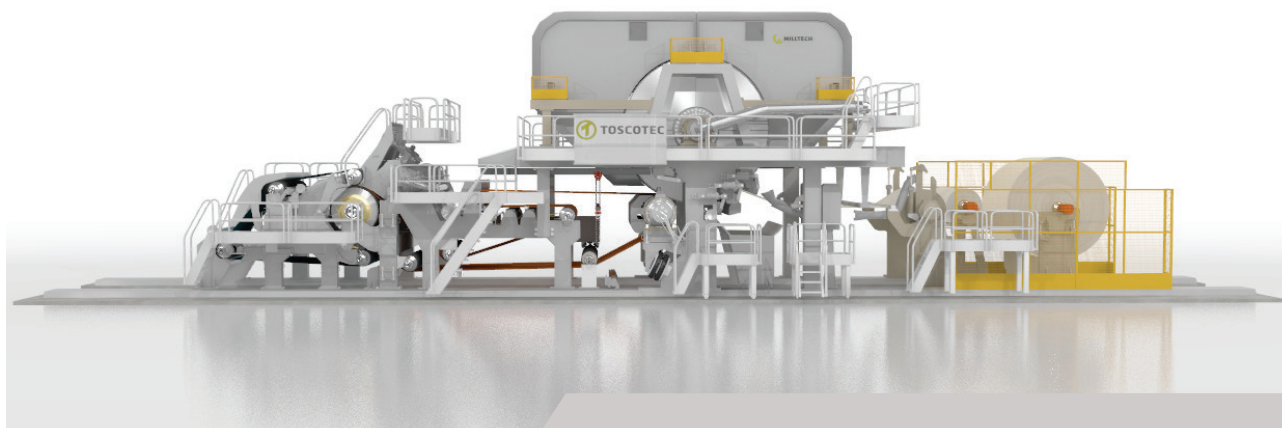

MODULO-PLUS

Net sheet width	2750÷2850 mm - 112 inch
Basis weight on reel	12-40 g/m ²
Crepe	10-25%
Design speed	1600 mpm
Max operating speed	1500 mpm
Max daily production	Up to 75* tpd
Yankee diameter	3660 mm

*referred to a single press configuration and 15 gsm at pope reel with 15% crepe ratio.

THE ES* LINE.

When gas and steam supplies are limited in the mill Tescotec proposes the **MODULO-PLUS ES**. Featuring an exhaust hood the ES model has a gross production of 50 tpd with an operating speed of 1050 mpm. A state of the art Steel Yankee Dryer TT SYD is successfully applied to **MODULO- PLUS** to increase production and decrease energy usage, too.



*Every Tescotec system delivers maximum energy efficiency with minimum environmental impact.

For more information:

info@toscotec.com, www.toscotec.com/products

Specifications in this document are subject to change without notice. Product names in this publication are all trademarks of Tescotec S.p.A.

www.toscotec.com