

TADVISION-S/L

When softness is a "must".

Toscotec offers two TAD solutions: **TADVISION-S** and **TADVISION-L**, choice of which depends on the rate of production required.


The **TADVISION-S** standard unit consists of a C-wrap former, a multilayered headbox (TT Headbox-MLT), complete cantilevered framing sections, serpentine TAD outflow type unit with the hot air system, an hydraulically loaded plain press roll (Ø 1050 mm), a Steel Yankee Dryer TT SYD-16FT (4876 mm) working at max 10 bar(g) and an hydraulic Pope

reel type TT Reel-H with max reel diameter up to 3000 mm.


An alternative upgraded solution of the **TADVISION-S** foresees the multilayered headbox (TT Headbox-MLT) with Dilution System, the advanced hydraulic Pope reel type TT Reel-H featuring linear secondary arms, spool drive assist and enhanced automatic reel spools magazine.

The **TADVISION-L** standard unit consists of a C-wrap former, a multilayered headbox (TT Headbox-MLT) with Dilution System, complete

cantilevered framing sections, a serpentine TAD outflow type unit with the hot air system, an hydraulically loaded plain press roll (Ø 1200 mm), a Steel Yankee Dryer TT SYD-18FT (5486 mm) working at max 10 bar(g), an hydraulic Pope reel type TT Reel-H+ featuring linear secondary arms, spool drive assist and enhanced automatic reel spools magazine with max reel diameter up to 3000 mm.

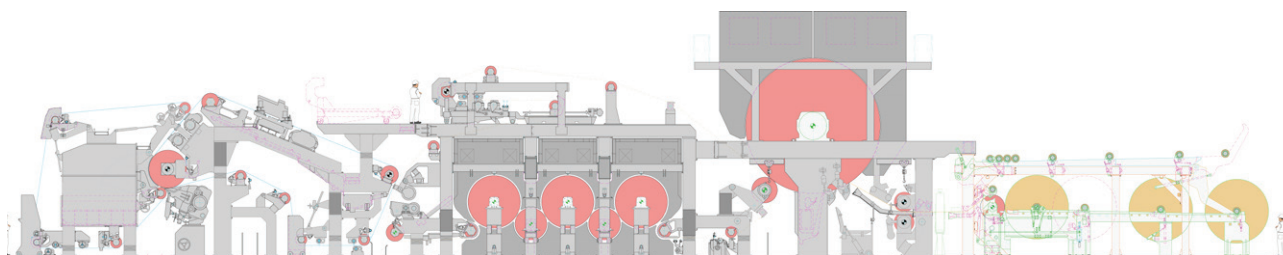

■ **TADVISION-S**

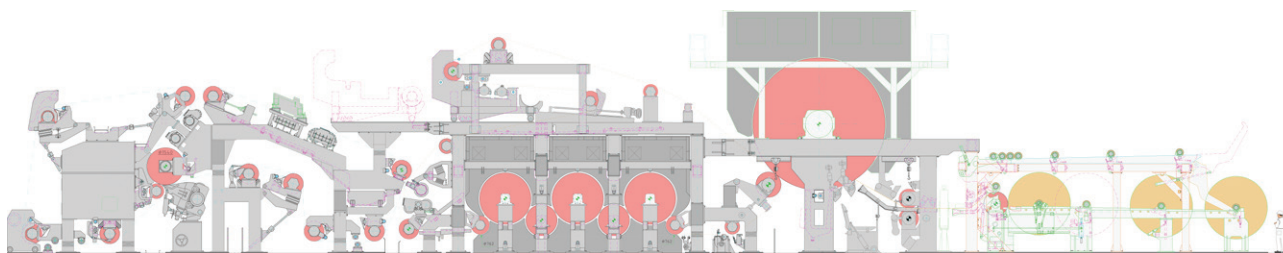

■ **TADVISION-L**

TADVISION	TADVISION-S	TADVISION-L
Net sheet width	Up to 2850 mm - 112 inch	Up to 5600 mm - 220.5 inch
Basis weight on reel	14-45 g/m ²	14-45 g/m ²
Crepe	7-20%	7-20%
Design speed	1600 mpm	1600 mpm
Max operating speed	1500 mpm	1500 mpm
Gross daily production	Up to 120 tpd	Up to 240 tpd
Yankee diameter	4876 mm	5486 mm



For more information:
info@toscotec.com, www.toscotec.com/products

Specifications in this document are subject to change without notice. Product names in this publication are all trademarks of Toscotec S.p.A.

www.toscotec.com